


A CORPORATION STOP SHALL BE INSTALLED WITH A LENGTH OF 1"Ø COPPER TUBING EXTENDING ABOVE THE FINISHED GRADE. THE TUBING SHALL BE INSTALLED WITH A 180° DOWNTURN BEND.

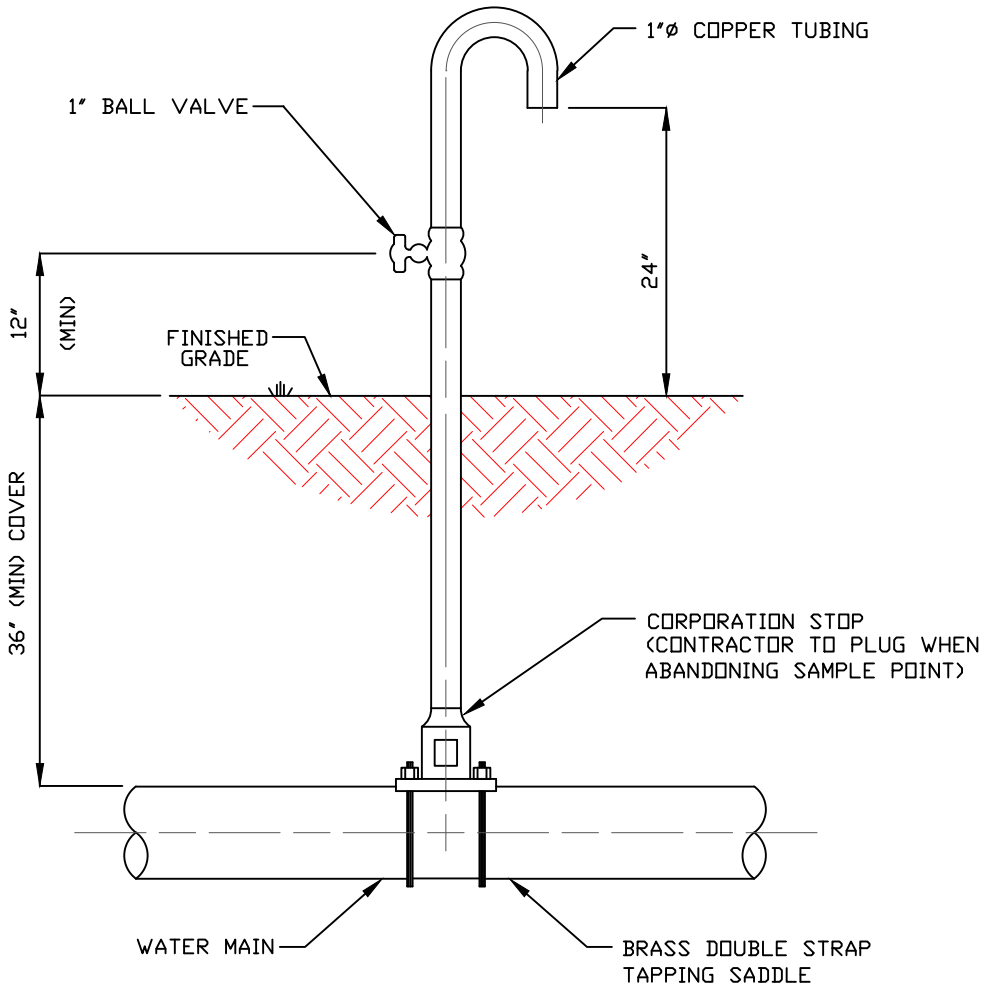

ELEVATION

-ART-

NOTES

1. TEMPORARY SAMPLING POINT SHALL BE CONSTRUCTED OF SCHEDULE 40 PVC PIPE OR OTHER MATERIALS AS APPROVED BY IRCDUS.
2. NO SAMPLE POINT SHALL BE CONSTRUCTED ON FIRE HYDRANTS.
3. CERTIFICATION OF PRESSURE TEST, TWO CONSECUTIVE DAYS OF SUCCESSFUL BACTERIOLOGICAL TESTS, AND CLEARANCE FROM THE FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION IS REQUIRED BEFORE THE SAMPLE TAP CAN BE ABANDONED.
4. WHEN SAMPLING IS COMPLETE, TUBING SHALL BE REMOVED AND CORPORATION STOP PLUGGED.

INDIAN RIVER COUNTY
DEPARTMENT OF
UTILITY SERVICES



TEMPORARY SAMPLING POINT
(BACTERIOLOGICAL)

DRAWING
NO.
W-8

MARCH 2018